


REAR FARM

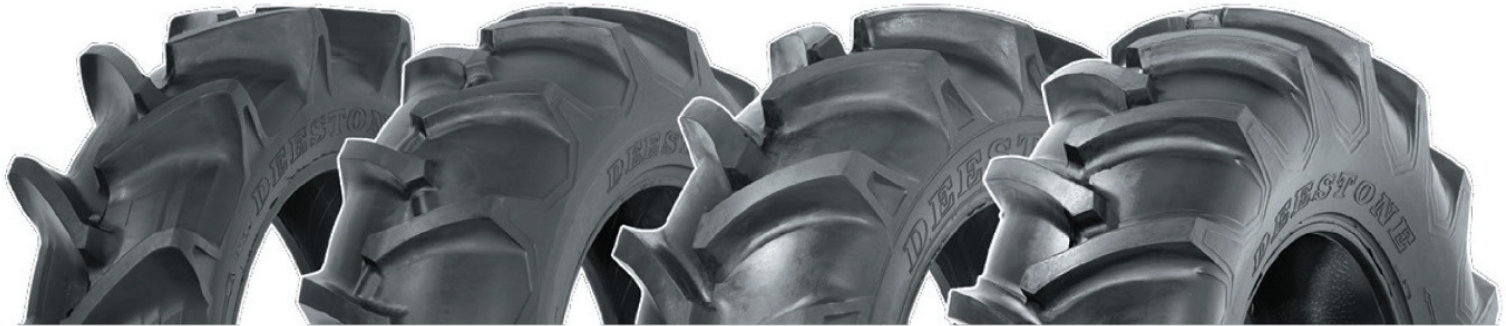

D409

D312A

D312B

D312C

PATTERN NAME	SIZE	PLY RATING	LI/SS	TYPE	INFLATED DIMENSION		TREAD DEPTH	INFLATION PRESSURE	MAX. LOAD	MAX. SPEED	RIM WIDTH
					OD(mm)	SW(mm)	(mm)	PSI/kPa	KGS/LBS	KPH/MPH	Inch
D409	9.5-24	6	102A8	TT	1048	241	38.4	30/210	850/1870	40/25	8.00
	9.5-24	8	109A8	TT	1048	241	38.4	40/275	1030/2270	40/25	8.00
	9.5-24	10	115A8	TT	1048	241	38.4	50/345	1215/2680	40/25	8.00
D312A	11.2-24	6	106A8	TL	1103	284	23.0	26/180	950/2090	40/25	10.00
	11.2-24	8	113A8	TT	1103	284	23.0	36/250	1150/2540	40/25	10.00
	11.2-24	8	113A8	TL	1103	284	23.0	36/250	1150/2540	40/25	10.00
D312B	12.4-24	6	111A8	TL	1159	315	44.0	24/165	1090/2400	40/25	11.00
	12.4-24	8	117A8	TT	1159	315	44.0	32/220	1285/2830	40/25	11.00
	12.4-24	8	117A8	TL	1159	315	44.0	32/220	1285/2830	40/25	11.00
	12.4-24	10	121A8	TL	1159	315	44.0	40/280	1450/3195	40/25	11.00
D312C	14.9-24	6	119A8	TL	1265	378	37.0	20/140	1360/3000	40/25	13.00
	14.9-24	8	124A8	TL	1265	378	37.0	26/180	1600/3520	40/25	13.00

REAR FARM



D312D

D312E

PATTERN NAME	SIZE	PLY RATING	LI/SS	TYPE	INFLATED DIMENSION		TREAD DEPTH	INFLATION PRESSURE	MAX. LOAD	MAX. SPEED	RIM WIDTH
					OD(mm)	SW(mm)	(mm)	PSI/kPa	KGS/LBS	KPH/MPH	Inch
D312D	18.4-26	12	142A8	TT	1450	467	38.4	32/220	2650/5840	40/25	16.00
		12	142A8	TL	1450	467	38.4	32/220	2650/5840	40/25	16.00
D312E	13.6-24	6	115A8	TL	1210	345	35.0	22/150	1215/2680	40/25	12.00
		8	120A8	TL	1210	345	35.0	28/190	1400/3080	40/25	12.00
	14.9-24	8	124A8	TL	1265	378	35.0	26/180	1600/3525	40/25	13.00
	13.6-28	8	122A8	TL	1311	345	35.0	28/190	1500/3300	40/25	12.00
	14.9-28	8	126A8	TL	1367	378	35.0	26/180	1700/3740	40/25	13.00
		10	130A8	TL	1367	378	35.0	32/220	1900/4180	40/25	13.00
	16.9-28	8	131A8	TL	1435	429	37.0	24/170	1950/4300	40/25	15.00
		10	134A8	TL	1435	429	37.0	28/190	2120/4680	40/25	15.00
	16.9-30	8	132A8	TL	1485	429	37.0	24/165	2000/4410	40/25	15.00
	18.4-30	8	135A8	TT	1552	467	28.8	20/140	2180/4800	40/25	16.00
			135A8	TT	1552	467	40.0	20/140	2180/4800	40/25	16.00
		12	145A8	TT	1552	467	28.8	32/220	2900/6400	40/25	16.00
			145A8	TT	1552	467	40.0	32/220	2900/6400	40/25	16.00
	18.4-34	10	143A8	TL	1654	467	40.0	26/180	2725/6000	40/25	16.00
	13.6-38	10	-/A8	TT	1565	345	35.0	33/230	2015/4400	40/25	11.00
	18.4-38	10	145A8	TL	1755	467	40.0	26/180	2900/6400	40/25	16.00
		12	149A8	TL	1755	467	40.0	32/220	3250/7150	40/25	16.00
	20.8-38	10	148A8	TL	1834	528	40.0	22/150	3150/6950	40/25	18.00
12		152A8	TL	1834	528	40.0	28/190	3550/7850	40/25	18.00	

Source : Deestone

Disclaimer: All product information and applications contained in this page may be subject to change without notice.