


REAR FARM

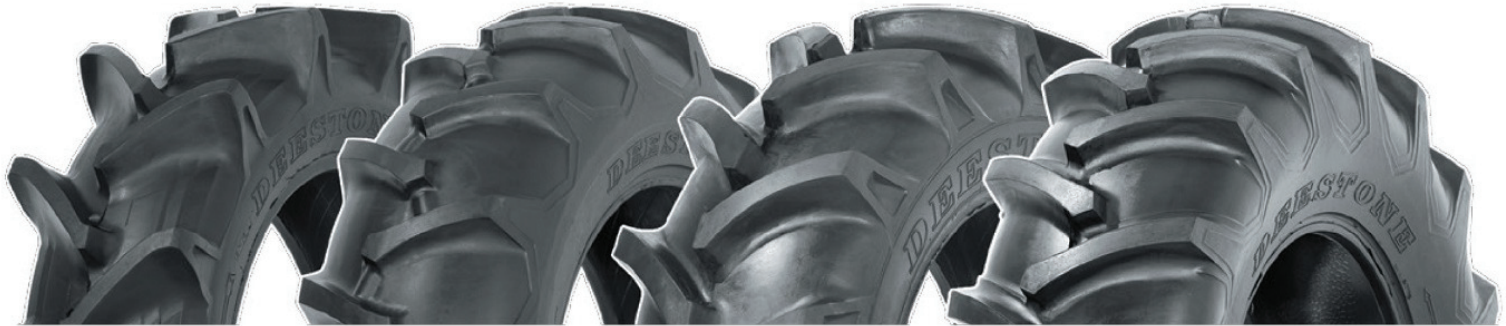

D409

D312A

D312B

D312C

PATTERN NAME	SIZE	PLY RATING	LI/SS	TYPE	INFLATED DIMENSION		TREAD DEPTH	INFLATION PRESSURE	MAX. LOAD	MAX. SPEED	RIM WIDTH
					OD(mm)	SW(mm)	(mm)	PSI/kPa	KGS/LBS	KPH/MPH	Inch
D409	9.5-24	6	102A8	TT	1048	241	38.4	30/210	850/1870	40/25	8.00
	9.5-24	8	109A8	TT	1048	241	38.4	40/275	1030/2270	40/25	8.00
	9.5-24	10	115A8	TT	1048	241	38.4	50/345	1215/2680	40/25	8.00
D312A	11.2-24	6	106A8	TL	1103	284	23.0	26/180	950/2090	40/25	10.00
	11.2-24	8	113A8	TT	1103	284	23.0	36/250	1150/2540	40/25	10.00
	11.2-24	8	113A8	TL	1103	284	23.0	36/250	1150/2540	40/25	10.00
D312B	12.4-24	6	111A8	TL	1159	315	44.0	24/165	1090/2400	40/25	11.00
	12.4-24	8	117A8	TT	1159	315	44.0	32/220	1285/2830	40/25	11.00
	12.4-24	8	117A8	TL	1159	315	44.0	32/220	1285/2830	40/25	11.00
	12.4-24	10	121A8	TL	1159	315	44.0	40/280	1450/3195	40/25	11.00
D312C	14.9-24	6	119A8	TL	1265	378	37.0	20/140	1360/3000	40/25	13.00
	14.9-24	8	124A8	TL	1265	378	37.0	26/180	1600/3520	40/25	13.00