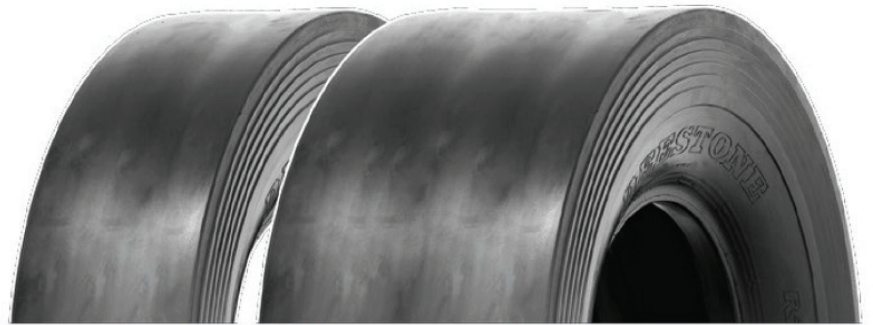


COMPACTOR


DC-1
DC327

| PATTERN NAME | SIZE | PLY RATING | LI/SS | TYPE | INFLATED DIMENSION | | TREAD DEPTH | INFLATION PRESSURE | MAX. LOAD | MAX. SPEED | RIM WIDTH |
|--------------|-------------|------------|-------|------|--------------------|--------|-------------|--------------------|------------|------------|-----------|
| | | | | | OD(mm) | SW(mm) | (mm) | PSI/kPa | KGS/LBS | KPH/MPH | Inch |
| DC-1 | 9.00-20 | 14 | 159A2 | TT | 1016 | 259 | - | 105/725 | 4375/9650 | 10/5 | 7.00 |
| | 11.00-20 | 16 | 167A2 | TT | 1083 | 293 | - | 105/725 | 5450/12000 | 10/5 | 8.00 |
| DC327 | 9.00-20 | 14 | 159A2 | TT | 1016 | 259 | 16.0 | 105/725 | 4375/9650 | 10/5 | 7.00 |
| | 14.00/70-20 | 14 | 158A2 | TT | 990 | 358 | 16.0 | 73/500 | 4250/9365 | 10/5 | 11.00 |

Source : Deestone

Disclaimer: All product information and applications contained in this page may be subject to change without notice.