



DURABILITY AND SUPERIOR
PERFORMANCE ON WET ROADS,
IN ONE UNBEATABLE TYRE.

VT800



Longer Life


Potential service life has been extended by the **greater volume of contact rubber**. ①

Wet Handling

The **wider ground contact patch** ② in conjunction with the **rigid tread ribs** ③ and **drainage grooves** ④ offer superb handling even in the wet.

Wet Braking

Shorter wet braking distances have been achieved through a **larger ground contact patch** ⑤ and a large number of **offset lateral edges and sipes**. ⑥

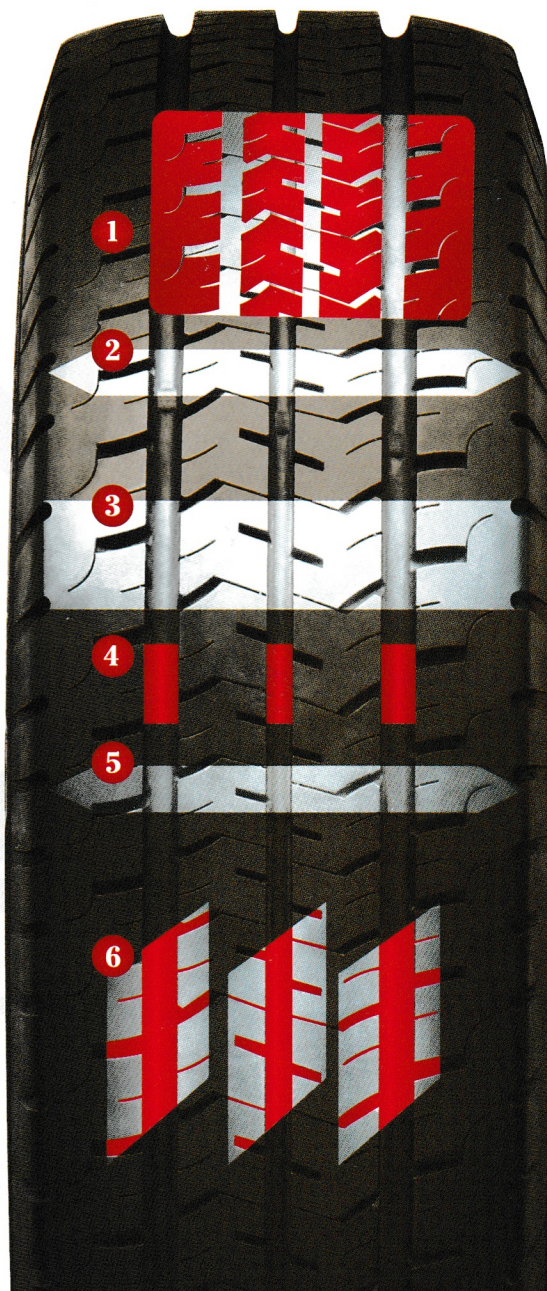

Viking TransTech VT800

Rim	Dimension	Load Index
13	165 R 13 C	91/89 N
13	175 R 13 C	97/95 N
14	165 R 14 C	97/95 S
14	185 R 14 C	102/100 Q
14	195 R 14 C	106/104 Q
14	205/75 R 14 C	109/107 Q
15	195 R 15 C	106/104 R
15	225/70 R 15 C	112/110 Q